

1100W LED 120-277V



Physical


Total Length	1100mm	43.3"
Total Width	1090mm	43"
Total Height	50mm	2"
Total Weight	10.5kg	23lbs

Performance

Input Voltage	120-277V
120V	9.17A
208V	5.29A
240V	4.58A
277V	3.97A
Input Current	9.17A - 3.97A
Input Power	1100W+/-5%
Power Factor	>0.95
Thermal Management	Passive
Lifetime	L70: >54,000 hrs
Onboard Dimming	20%-40%-60%-80%-100%-EXT/OFF
Max Operation Temp	104 °F (40 °C)
Power Cord	12ft
120V	NEMA 6-15P to NEMA 5-15P Adapter
208-240V	NEMA 6-15P
277V	NEMA L7-15P (SOLD SEPARATELY)
Rated Mains Voltage	120-277V
Voltage Range	108-305
Mains Frequency	50/60Hz
Operation Frequency	50/60Hz
PPE	3.0 µmol/J
PPF	3300 µmol/s

1100W LED Distance From Canopy: 12" 4x4 Footprint

628	850	965	925	960	946	958	831	645
978	1321	1430	1431	1475	1471	1443	1314	960
1220	1619	1753	1745	1763	1767	1720	1602	1213
1294	1686	1833	1845	1860	1869	1826	1670	1263
1305	1702	1861	1889	1883	1888	1857	1706	1275
1285	1682	1855	1847	1852	1850	1823	1673	1254
1226	1618	1760	1750	1735	1749	1747	1616	1223
967	1326	1475	1448	1443	1453	1445	1306	960
649	844	966	922	942	925	951	842	632

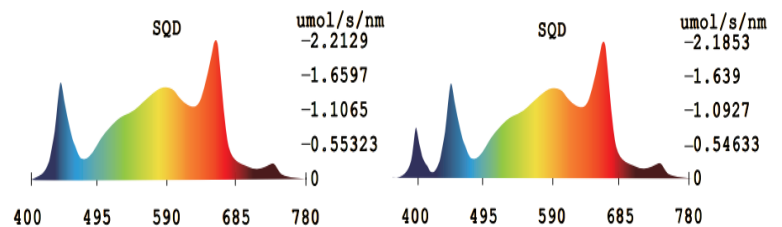

Wavelength (NM) - Full Spectrum

