


400W LED 120-277V



Physical		
Total Length	1100mm	43.3"
Total Width	988mm	39"
Total Height	50mm	2"
Total Weight	6.35kg	14lbs
Performance		
Input Voltage	120-277V	
120V	3.33A	
208V	1.92A	
240V	1.67A	
277V	1.44A	
Input Current	3.33A - 1.44A	
Input Power	400W+/-5%	
Power Factor	>0.95	
Thermal Management	Passive	
Lifetime	L70: >54,000 hrs	
Onboard Dimming	20%-40%-60%-80%-100%-EXT/OFF	
Max Operation Temp	104 °F (40 °C)	
Power Cord	12ft	
120V	NEMA 6-15P to NEMA 5-15P Adapter	
208-240V	NEMA 6-15P	
277V	NEMA L7-15P (SOLD SEPARATELY)	
Rated Mains Voltage	120-277V	
Voltage Range	108-305	
Mains Frequency	50/60Hz	
Operation Frequency	50/60Hz	
PPE	3.0 µmol/J	
PPF	1200 µmol/s	

400W LED Distance From Canopy: 12" 4x4 Footprint								
242	313	341	349	342	350	335	314	233
371	502	549	552	552	551	540	508	369
465	621	667	683	678	680	667	609	450
505	657	711	727	722	727	712	652	499
511	666	722	735	727	736	722	660	510
505	658	712	725	720	727	714	653	497
477	616	668	674	672	681	660	617	455
382	505	550	552	547	552	552	512	372
257	326	356	367	345	364	356	324	257

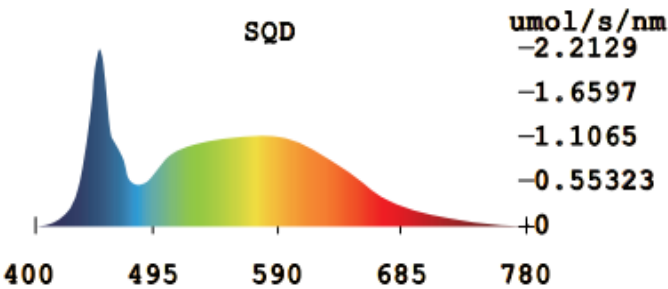

Wavelength (NM) - Full Spectrum

